


Strut profile 40x40L 6 m

Art.no.: 2401-3842529339

Strong aluminum profile from Rexroth. Ideal for large modular constructions, frames, and industrial applications. Supplied in 6-meter length.

The Rexroth strut profile 40x40L is made of natural anodized aluminum, providing excellent strength and flexibility. Features slots for easy attachment of accessories and components, making it perfect for frame building, machine construction, and heavy-duty structures. Dimensions: 40x40 mm. Length: 6070 mm. Material: Aluminum.

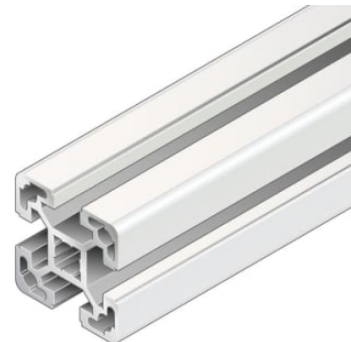

Color	Natural
Material	Aluminum, anodized
Modular dimension	40 mm
Cross-section	40x40L
Profile slot	10.0
Open slots	4.0
Profile type	Standard
Dimensions	40x40
ESD	true
Area moment of inertia in y-direction [I _y]	9.1 cm
Moment of resistance in the x-direction [W _x]	4.5 cm ³
Area moment of inertia in x-direction [I _x]	9.1 cm
Moment of torsion resistance [W _t]	0.74 cm ³
Moment of resistance in the y-direction [W _y]	4.5 cm ³
Torsional moment of inertia [I _t]	1.3 cm
Length [L]	6070 mm
Mass [m]	1.5 kg/m
Profile surface [A]	5.6 cm ²
Brand	rexroth
HS code	76042100
COO	NLD

Sales unit: PCS


Master packaging (pcs) 20



40x40L

A = 5,6 cm²
I_x = 9,1 cm⁴
I_y = 9,1 cm⁴
W_x = 4,5 cm³
W_y = 4,5 cm³
I_t = 1,3 cm⁴
W_t = 0,74 cm³
m = 1,5 kg/m

111199



Read more about the product here:

<https://john-dahle.no/product?number=2401-3842529339>