

Eye bolt – RUD RS, UNF



Art.no.: 0218560

The RUD RS eye bolt with UNF thread offers a higher Working Load Limit (WLL) than standard DIN 580. Certified and tested by DGUV with a 4:1 safety factor. Designed for extreme conditions from -40 °C to 200 °C. WLL is clearly marked in all directions to prevent overload.


The RUD RS eye bolt is a reliable lifting solution featuring UNF threads and a significantly higher WLL compared to DIN 580. DGUV-certified with a 4:1 safety factor, it withstands temperatures from -40 °C to 200 °C. Load limits are clearly indicated for safe use.



| | |
|------------------------|--------------|
| Weight | 0.1 kg |
| Min. temp. | -40°C |
| Max. temp. | +200°C |
| Thread size | 3/8" - 24UNF |
| Thread size (inches) | 3/8" |
| WLL | 0,25 T |
| HS code | 73181500 |
| COO | - |
| Sales unit: | PCS |
| Master packaging (pcs) | 20 |

Measurements

| | |
|---|--------------|
| A | 15 mm |
| B | 11 mm |
| C | 10 mm |
| D | 25 mm |
| E | 25 mm |
| M | 3/8" - 24UNF |
| T | 34 mm |

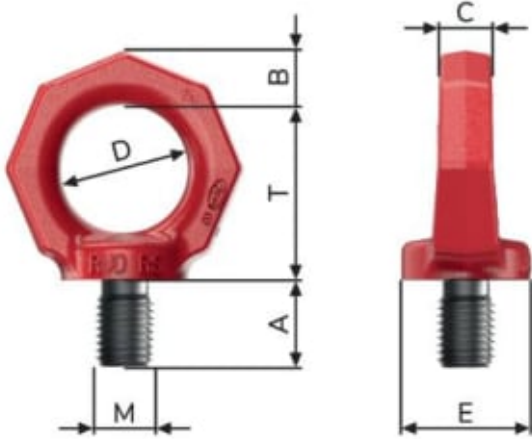

Read more about the product here:

<https://john-dahle.no/product?number=0218560>