


# Rundsling 2 tonn

Utførelse: Dobbel duk

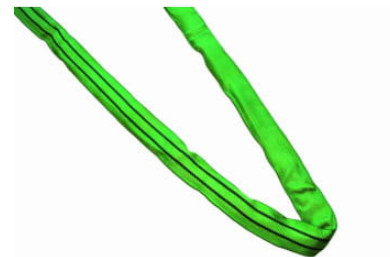

Bredde 50 mm

Farge Grønn

Materiale Polyester

Produsert i henhold til NS-EN 1492-2

**LØFTETABELL FOR FIBERSTROPPER**  
RUNDSLINGS OG BÅNDSTROPPER  
WLL - i Tonn

FARGE	Bredde mm	EN STROPPE			TO STROPPER			TRE- OG FIRE STROPPER			
		Rett	Skåret	U/Dobbel	30°	45°	60°	30°	45°	60°	
Blått	20 mm	1,0	0,8	2,0	1,7	1,7	1,4	1,0	2,8	2,1	1,8
Grønn	20 mm	2,0	1,6	4,0	3,4	3,4	2,8	2,0	5,2	4,2	3,6
Gul	30 mm	3,0	2,4	6,0	5,1	5,1	4,2	3,0	7,8	6,3	5,4
Grå	40 mm	4,0	3,2	8,0	6,8	6,8	5,6	4,0	10,4	8,4	7,2
Rød	50 mm	5,0	4,0	10,0	8,5	8,5	7,0	5,0	13,0	10,5	9,0
Svart	60 mm	6,0	4,8	12,0	10,2	10,2	8,4	6,0	15,6	12,5	10,8
Blå	80 mm	8,0	6,4	16,0	13,6	13,6	11,2	8,0	20,8	16,8	14,4
Orange	100 mm	10,0	8,0	20,0	17,0	17,0	14,0	10,0	26,0	21,0	18,0
Orange	110 mm	11,0	8,8	22,0	18,7	18,7	15,4	11,0	28,6	22,9	19,8
Orange	120 mm	12,0	9,6	24,0	20,4	20,4	16,8	12,0	31,2	24,9	21,6
Orange	130 mm	13,0	10,4	26,0	22,1	22,1	18,0	13,0	33,8	27,0	23,4
Orange	140 mm	14,0	11,2	28,0	23,8	23,8	19,6	14,0	36,4	29,1	25,2
Orange	150 mm	15,0	12,0	30,0	25,5	25,5	21,0	15,0	39,0	31,2	27,0
Orange	160 mm	16,0	12,8	32,0	27,2	27,2	22,4	16,0	41,6	33,3	28,8
Orange	170 mm	17,0	13,6	34,0	28,9	28,9	23,8	17,0	44,2	35,4	30,6
Orange	180 mm	18,0	14,4	36,0	30,6	30,6	25,2	18,0	46,8	37,5	32,4
Orange	190 mm	19,0	15,2	38,0	32,3	32,3	26,6	19,0	49,4	39,6	34,2
Orange	200 mm	20,0	16,0	40,0	34,0	34,0	28,0	20,0	52,0	41,7	36,0
Orange	220 mm	22,0	17,6	44,0	37,4	37,4	30,8	22,0	57,2	45,9	39,6
Orange	240 mm	24,0	19,2	48,0	40,8	40,8	33,6	24,0	62,4	50,1	43,2
Orange	260 mm	26,0	20,8	52,0	44,2	44,2	36,4	26,0	67,6	54,3	46,8
Orange	280 mm	28,0	22,4	56,0	47,6	47,6	39,2	28,0	72,8	58,5	50,4
Orange	300 mm	30,0	24,0	60,0	51,0	51,0	42,0	30,0	78,0	62,7	54,0
Orange	320 mm	32,0	25,6	64,0	54,4	54,4	44,8	32,0	83,2	66,9	57,6
Orange	340 mm	34,0	27,2	68,0	57,8	57,8	47,6	34,0	88,4	71,1	61,2
Orange	360 mm	36,0	28,8	72,0	61,2	61,2	50,4	36,0	93,6	75,3	64,8
Orange	380 mm	38,0	30,4	76,0	64,6	64,6	53,2	38,0	98,8	79,5	68,4
Orange	400 mm	40,0	32,0	80,0	68,0	68,0	56,0	40,0	104,0	83,7	72,0
Orange	420 mm	42,0	33,6	84,0	71,4	71,4	58,8	42,0	109,2	87,9	75,6
Orange	440 mm	44,0	35,2	88,0	74,8	74,8	61,6	44,0	114,4	92,1	79,2
Orange	460 mm	46,0	36,8	92,0	78,2	78,2	64,4	46,0	119,6	96,3	82,8
Orange	480 mm	48,0	38,4	96,0	81,6	81,6	67,2	48,0	124,8	100,5	86,4
Orange	500 mm	50,0	40,0	100,0	85,0	85,0	70,0	50,0	130,0	104,7	90,0
Orange	520 mm	52,0	41,6	104,0	88,4	88,4	72,8	52,0	135,2	108,9	93,6
Orange	540 mm	54,0	43,2	108,0	91,8	91,8	75,6	54,0	140,4	113,1	97,2
Orange	560 mm	56,0	44,8	112,0	95,2	95,2	78,4	56,0	145,6	117,3	100,8
Orange	580 mm	58,0	46,4	116,0	98,6	98,6	81,2	58,0	150,8	121,5	104,4
Orange	600 mm	60,0	48,0	120,0	102,0	102,0	84,0	60,0	156,0	125,7	108,0
Orange	620 mm	62,0	49,6	124,0	105,4	105,4	86,8	62,0	161,2	129,9	111,6
Orange	640 mm	64,0	51,2	128,0	108,8	108,8	89,6	64,0	166,4	134,1	115,2
Orange	660 mm	66,0	52,8	132,0	112,2	112,2	92,4	66,0	171,6	138,3	118,8
Orange	680 mm	68,0	54,4	136,0	115,6	115,6	95,2	68,0	176,8	142,5	122,4
Orange	700 mm	70,0	56,0	140,0	119,0	119,0	98,0	70,0	182,0	146,7	126,0
Orange	720 mm	72,0	57,6	144,0	122,4	122,4	100,8	72,0	187,2	150,9	129,6
Orange	740 mm	74,0	59,2	148,0	125,8	125,8	103,6	74,0	192,4	155,1	133,2
Orange	760 mm	76,0	60,8	152,0	129,2	129,2	106,4	76,0	197,6	159,3	136,8
Orange	780 mm	78,0	62,4	156,0	132,6	132,6	109,2	78,0	202,8	163,5	140,4
Orange	800 mm	80,0	64,0	160,0	136,0	136,0	112,0	80,0	208,0	167,7	144,0
Orange	820 mm	82,0	65,6	164,0	139,4	139,4	114,8	82,0	213,2	171,9	147,6
Orange	840 mm	84,0	67,2	168,0	142,8	142,8	117,6	84,0	218,4	176,1	151,2
Orange	860 mm	86,0	68,8	172,0	146,2	146,2	120,4	86,0	223,6	180,3	154,8
Orange	880 mm	88,0	70,4	176,0	149,6	149,6	123,2	88,0	228,8	184,5	158,4
Orange	900 mm	90,0	72,0	180,0	153,0	153,0	126,0	90,0	234,0	188,7	162,0
Orange	920 mm	92,0	73,6	184,0	156,4	156,4	128,8	92,0	239,2	192,9	165,6
Orange	940 mm	94,0	75,2	188,0	159,8	159,8	131,6	94,0	244,4	197,1	169,2
Orange	960 mm	96,0	76,8	192,0	163,2	163,2	134,4	96,0	249,6	201,3	172,8
Orange	980 mm	98,0	78,4	196,0	166,6	166,6	137,2	98,0	254,8	205,5	176,4
Orange	1000 mm	100,0	80,0	200,0	170,0	170,0	140,0	100,0	260,0	209,7	180,0
Orange	1020 mm	102,0	81,6	204,0	173,4	173,4	142,8	102,0	265,2	213,9	183,6
Orange	1040 mm	104,0	83,2	208,0	176,8	176,8	145,6	104,0	270,4	218,1	187,2
Orange	1060 mm	106,0	84,8	212,0	180,2	180,2	148,4	106,0	275,6	222,3	190,8
Orange	1080 mm	108,0	86,4	216,0	183,6	183,6	151,2	108,0	280,8	226,5	194,4
Orange	1100 mm	110,0	88,0	220,0	187,0	187,0	154,0	110,0	286,0	230,7	198,0
Orange	1120 mm	112,0	89,6	224,0	190,4	190,4	156,8	112,0	291,2	234,9	201,6
Orange	1140 mm	114,0	91,2	228,0	193,8	193,8	159,6	114,0	296,4	239,1	205,2
Orange	1160 mm	116,0	92,8	232,0	197,2	197,2	162,4	116,0	301,6	243,3	208,8
Orange	1180 mm	118,0	94,4	236,0	200,6	200,6	165,2	118,0	306,8	247,5	212,4
Orange	1200 mm	120,0	96,0	240,0	204,0	204,0	168,0	120,0	312,0	251,7	216,0
Orange	1220 mm	122,0	97,6	244,0	207,4	207,4	170,8	122,0	317,2	255,9	219,6
Orange	1240 mm	124,0	99,2	248,0	210,8	210,8	173,6	124,0	322,4	260,1	223,2
Orange	1260 mm	126,0	100,8	252,0	214,2	214,2	176,4	126,0	327,6	264,3	226,8
Orange	1280 mm	128,0	102,4	256,0	217,6	217,6	179,2	128,0	332,8	268,5	230,4
Orange	1300 mm	130,0	104,0	260,0	221,0	221,0	182,0	130,0	338,0	272,7	234,0
Orange	1320 mm	132,0	105,6	264,0	224,4	224,4	184,8	132,0	343,2	276,9	237,6
Orange	1340 mm	134,0	107,2	268,0	227,8	227,8	187,6	134,0	348,4	281,1	241,2
Orange	1360 mm	136,0	108,8	272,0	231,2	231,2	190,4	136,0	353,6	285,3	244,8
Orange	1380 mm	138,0	110,4	276,0	234,6	234,6	193,2	138,0	358,8	289,5	248,4
Orange	1400 mm	140,0	112,0	280,0	238,0	238,0	196,0	140,0	364,0	293,7	252,0
Orange	1420 mm	142,0	113,6	284,0	241,4	241,4	198,8	142,0	369,2	297,9	255,6
Orange	1440 mm	144,0	115,2	288,0	244,8	244,8	201,6	144,0	374,4	302,1	259,2
Orange	1460 mm	146,0	116,8	292,0	248,2	248,2	204,4	146,0	379,6	306,3	262,8
Orange	1480 mm	148,0	118,4	296,0	251,6	251,6	207,2	148,0	384,8	310,5	266,4
Orange	1500 mm	150,0	120,0	300,0	255,0	255,0	210,0	150,0	390,0	314,7	270,0
Orange	1520 mm	152,0	121,6	304,0	258,4	258,4	212,8	152,0	395,2	318,9	273,6
Orange	1540 mm	154,0	123,2	308,0	261,8	261,8	215,6	154,0	400,4	323,1	277,2
Orange	1560 mm	156,0	124,8	312,0	265,2	265,2	218,4	156,0	405,6	327,3	280,8
Orange	1580 mm	158,0	126,4	316,0	268,6	268,6	221,2	158,0	410,8	331,5	284,4
Orange	1600 mm	160,0	128,0	320,0	272,0	272,0	224,0	160,0	416,0	335,7	288,0
Orange	1620 mm	162,0	129,6	324,0	275,4	275,4	226,8	162,0	421,2	339,9	291,6
Orange	1640 mm	164,0	131,2	328,0	278,8	278,8	229,6	164,0	426,4	344,1	295,2
Orange	1660 mm	166,0	132,8	332,0	282						